



APPLICATIONS



REFRIGERATOR



AIRCONDITIONER

PRODUCT REFERENCE:
SA92

Sanicondens® Pro

The Sanicondens® Pro is specifically designed for disposal of condensate from air conditioning units, refrigeration units, ice machines and dehumidifiers etc. Includes a non-return valve and 6 m flexible discharge pipe.




TECHNICAL CHARACTERISTICS

Discharge Pipework	8/11 mm
Motor Power	60 Watts
Flow Rate	342 L/h
Voltages	220-240 V/50 Hz
Tank Volume	2 L
Working Waste Water Temp	35°C/Max 80°C (intermittent)
Product Weight	2 kg
Overall Measurements	260 x 169 x 143 mm
Inlet Pipework	25 mm
IP Rating	IP20

WHY CHOOSE THIS PRODUCT?

- 2 L tank
- Two entry points
- Working temperature of 35°C.
- Will handle temperatures up to 80°C for short periods (5 minutes)
- Supplied with 2 m of electric cable and 6 m of discharge pipe
- High level alarm connectivity

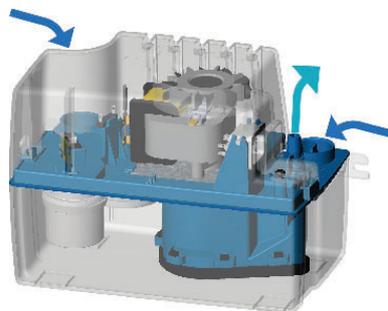

VERTICAL/HORIZONTAL PERFORMANCE

