



Sanispeed®+

Ideal for light commercial environments such as small shops, cafes, offices, bars, automatic coffee machines and dental surgeries where grey water needs to be disposed of.



WHY CHOOSE THIS PRODUCT?

Ideal for light commercial applications

Low activation level (95 mm)

Can connect to Alarm or Alarm Interlock

Four inlets - two side entries and two top entries


Working temperature of 35°C

Will handle up to 75°C for short periods (5 minutes)

Carbon filter included to neutralise odours


VERTICAL/HORIZONTAL PERFORMANCE

Increase size of horizontal run by one pipe size after 5m. All horizontal pipework requires a minimum of 1:100 fall.

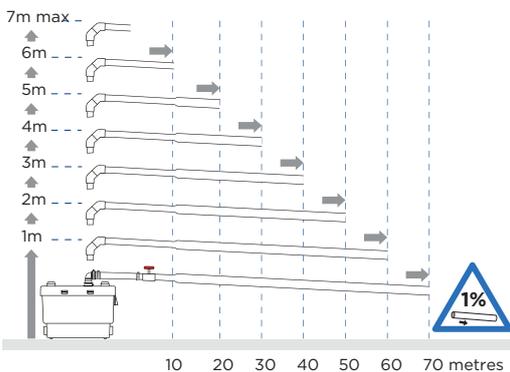


TECHNICAL CHARACTERISTICS

| | |
|---------------------------------|------------------------------|
| Discharge Pipework | 25 mm |
| Motor Power | 400 Watts |
| Voltages | 220-240 V/50 Hz |
| Working Waste Water Temp | 35°C/Max 75°C (intermittent) |
| Product Weight | 6.4 kg |
| Overall Measurements | 367 x 277 x 189 mm |
| Inlet Pipework | 40 mm |
| IP Rating | IP44 |

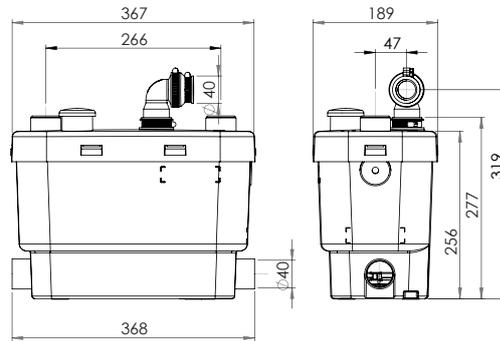

FLOW RATE PERFORMANCE CHART

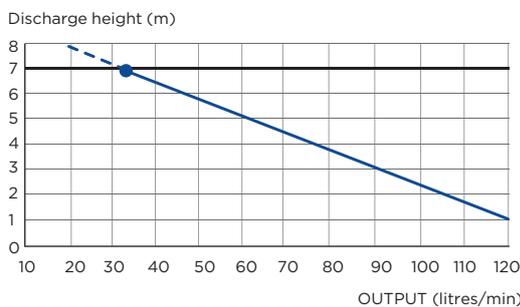

APPLICATIONS



HAND BASIN



BATH



SHOWER



WASHING MACHINE



DISH WASHER



KITCHEN SINK



WMTS 106:2019
Certificate No. 23048
Manufacturer: SFA
Brand: Saniflo

PRODUCT REFERENCE:
SA101

